

1/5

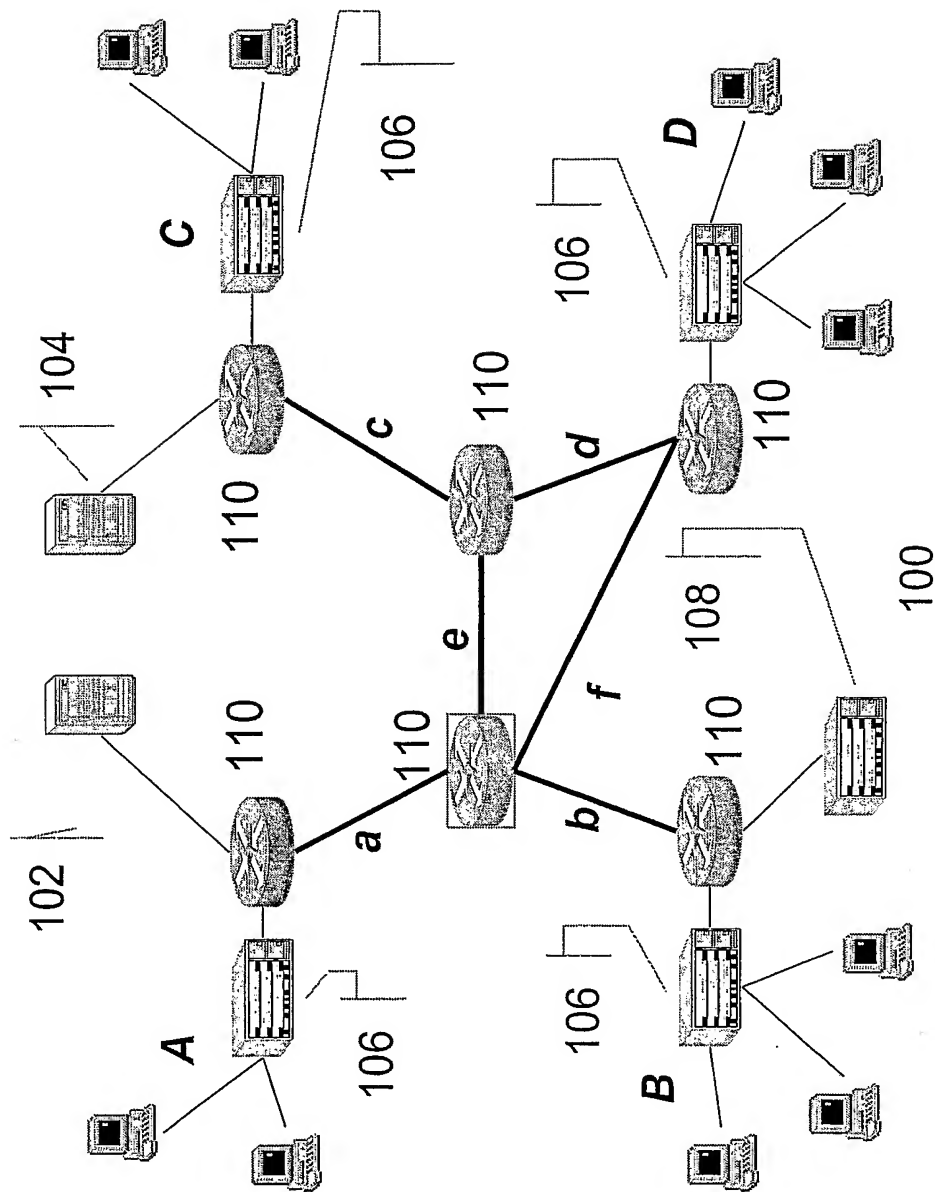


Fig. 1

2/5

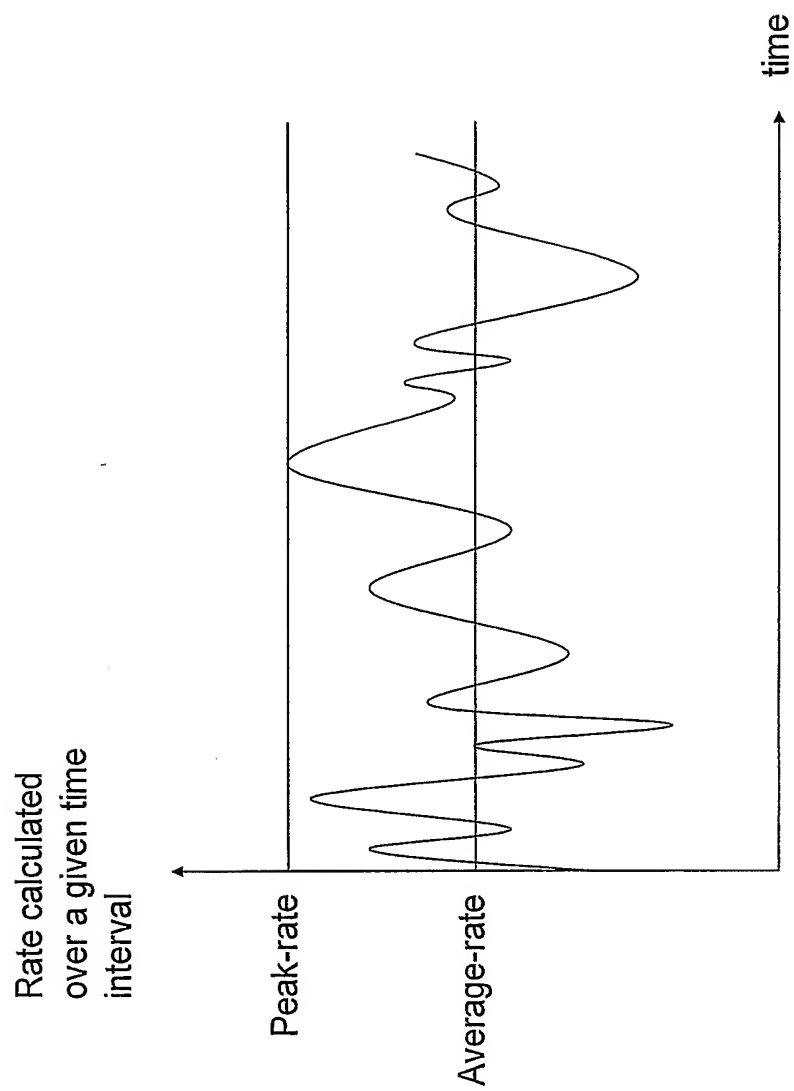


Fig. 2

	Load	A	B	C	D	
table 1	A	na	1	2	D	
	B	1	na	2	4	
	C	2	2	na	8	
	D	4	4	8	na	
table 2	Link:	a	b	c	d	f
	Load:	7	7	12	8	4
	Capacity:	7	7	10	6,4	3,809524
	Overload:	0	0	20	25	5
table 3	E2E	A	B	C	D	
	A	na	0	25	25	
	B	0	na	25	25	
	C	25	25	na	45	
	D	25	25	45	na	

```

graph TD
    A((A)) ---|a| B((B))
    B ---|b| C((C))
    A ---|c| C
    B ---|d| D((D))
    A ---|e| D
    B ---|f| C
    style A fill:#ccc,stroke:#333,stroke-width:1px
    style B fill:#ccc,stroke:#333,stroke-width:1px
    style C fill:#ccc,stroke:#333,stroke-width:1px
    style D fill:#ccc,stroke:#333,stroke-width:1px
  
```

Network diagram showing four nodes (A, B, C, D) connected in a mesh topology. Node A is top-left, B is bottom-left, C is top-right, and D is bottom-right. Links are labeled a, b, c, d, e, f. Link a (A-B) has load 0 and capacity 7. Link b (B-C) has load 0 and capacity 7. Link c (A-C) has load 20 and capacity 6,4. Link d (B-D) has load 25 and capacity 3,809524. Link e (A-D) has load 5 and capacity 12. Link f (B-C) has load 25 and capacity 4. The diagram also shows the end-to-end (E2E) loads for each path: A-B is 0, B-C is 0, A-C is 20, and B-D is 25.

Fig. 3

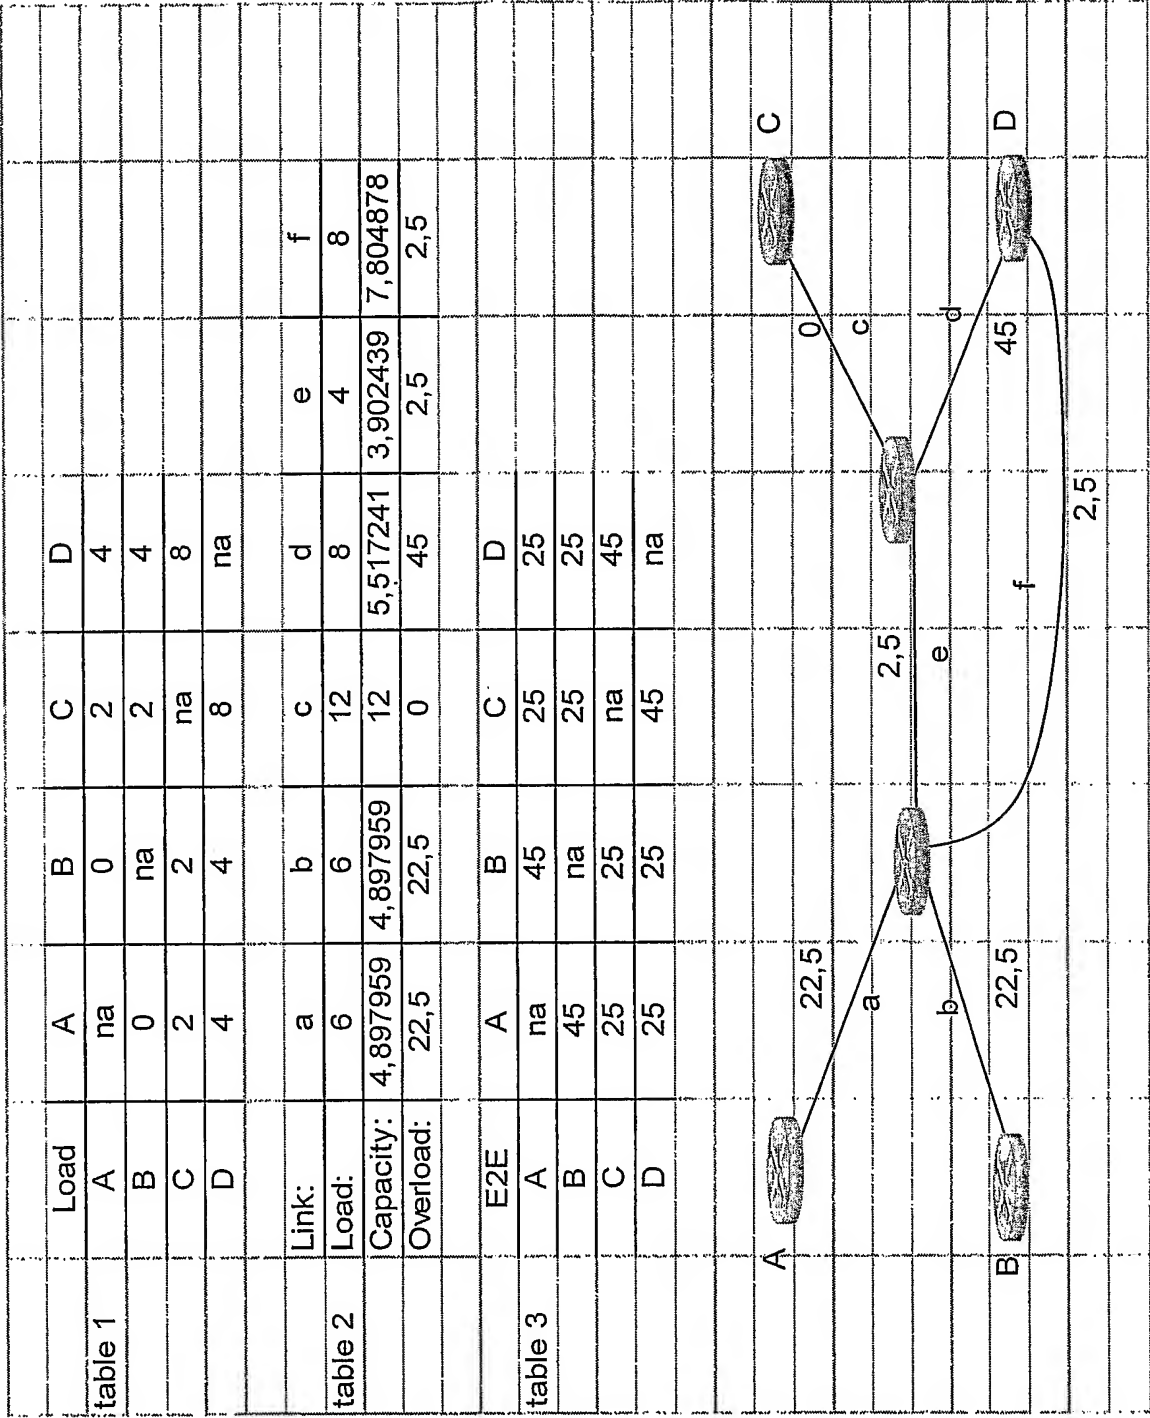


Fig. 4

5/5

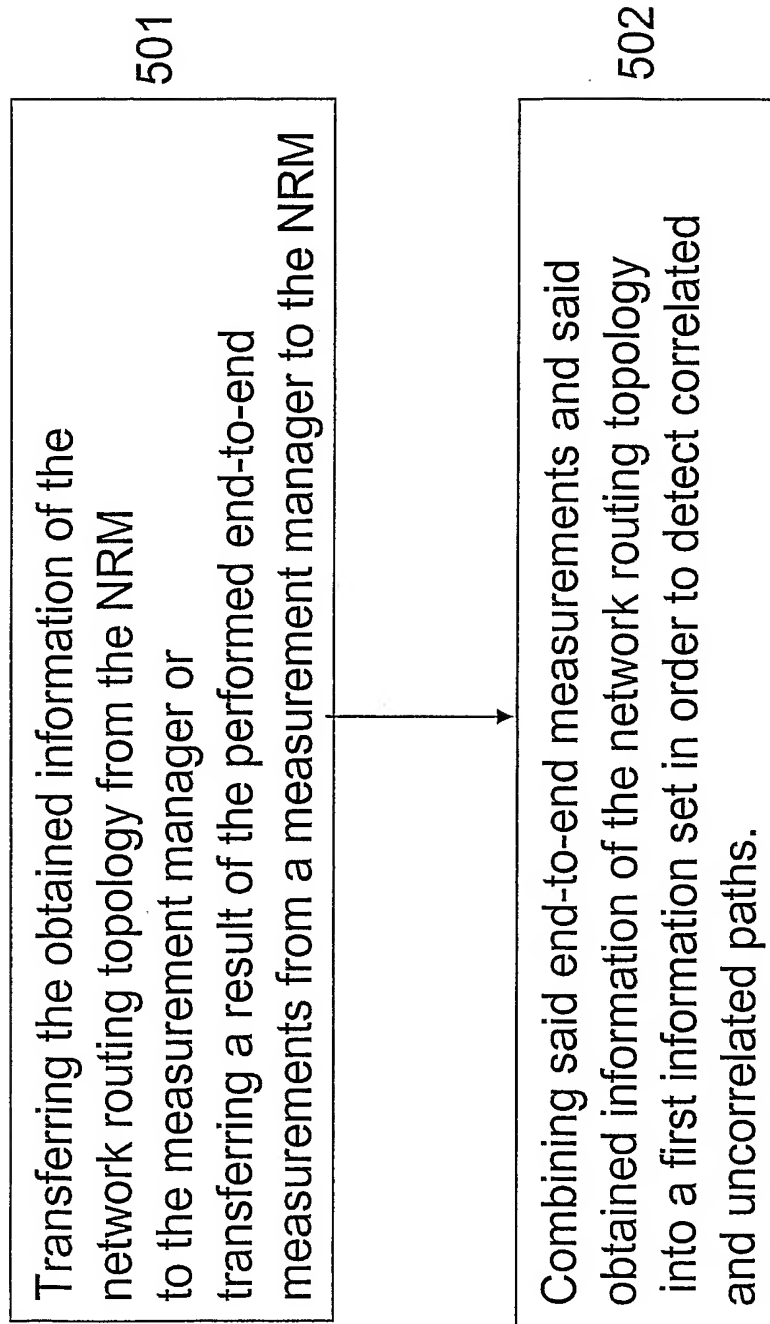


Fig. 5